


# TRENCH DETAIL AND SURFACE RESTORATION

SAND SEAL FULL WIDTH OF STREET FOR LONGITUDINAL TRENCHES  
AND 5' BEYOND SIDES OF PATCH FOR TRANSVERSE TRENCHES AND PITS

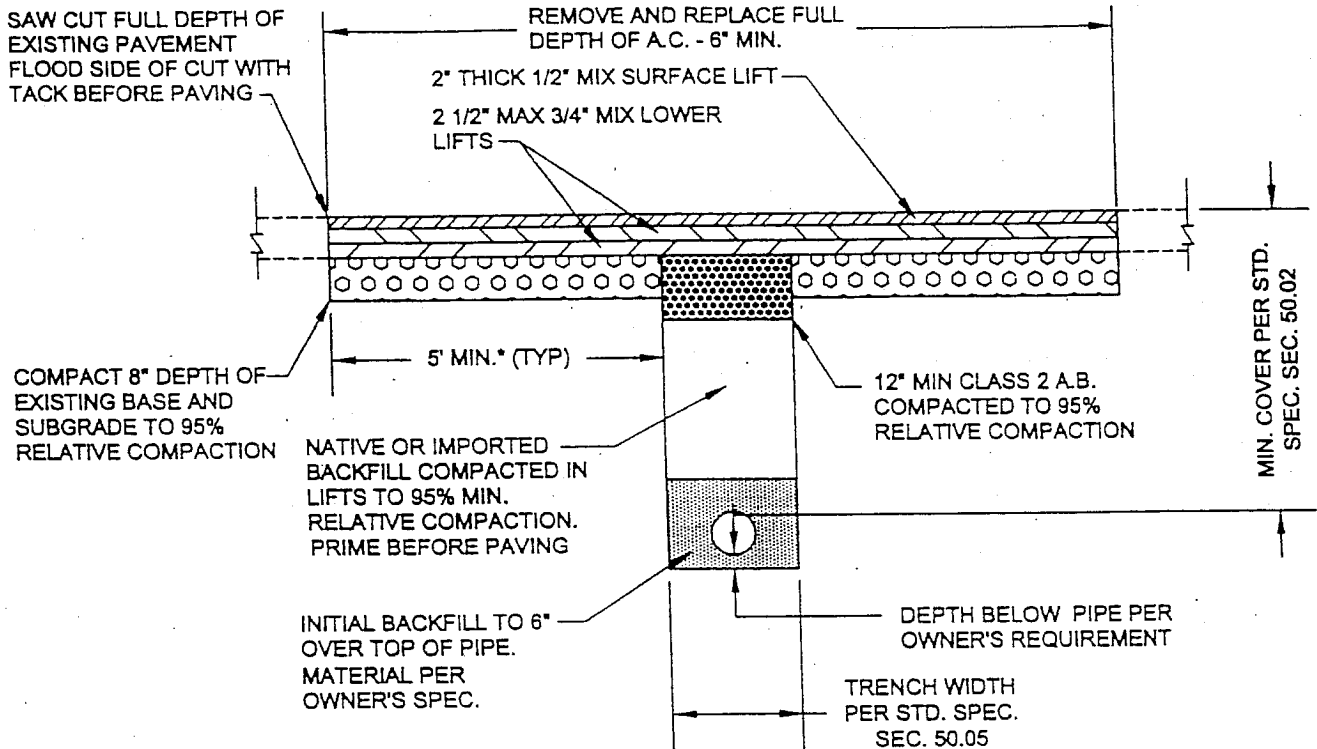

## TYPICAL TRENCH SECTION

- \* WIDTH MAY BE REDUCED TO 12" ON CERTAIN STREETS SCHEDULED FOR OVERLAY WITHIN 18 MONTHS, SUBJECT TO APPROVAL BY THE CITY ENGINEER AND NEGOTIATED IN LIEU PAYMENT.
- 1. TEMPORARY PAVEMENT SHALL BE PLACED IN UNPLATED TRENCHES AT THE END OF EACH DAY. MATERIAL SHALL BE HIGH QUALITY PATCH MIX, SUCH AS "GRANITEPATCH," "QUICKPATCH" OR "DUROPATCH." CUTBACK SHALL NOT BE USED IN STREET AREAS FOR TEMPORARY PATCHING.
- 2. PERMANENT SURFACE RESTORATION SHALL BE INSTALLED NO SOONER THAN 10 DAYS AND NO MORE THAN 25 WORKING DAYS AFTER TEMPORARY SURFACE RESTORATION IS FIRST PUT IN PLACE.



**TOWN OF ATHERTON  
STANDARD DRAWING**

March 2000